

HENRY TOOLS

Industrial Airtools at Work

MODELS
3927GHLS



General Safety and Maintenance Manual



Model Number	Exhaust Direction	Throttle Type	Speed	Power Output	Case Material	Weight		Length	Diameter Front Housing	Air Consumption	Wheel Capacity
							Steel				
3927GHLS	Side (Side is Standard)	(L) Lever or (K) Safety Lever	15000 to 22000 R.P.M. (18000RPM is Standard)	0.9 H.P. 675 W	Steel				1.120" 2.5cm	25cfm 11.8 L/S	Burrs/Mounted Stones of shank size 1/4 Inch, 3/8 Inch (with appropriate collet). Any Type 16, 17, 17R, 18 or 18R Cone Wheels w/ 3/8-24 or 5/8-11 or 1/2-13 Mounting.


THE HENRY TOOL CO., MANUFACTURED BY HENRY TOOLS

498 So. Belvoir Blvd., South Euclid, OH 44121 U.S.A.

Ph: (216) 291-1011 or (800) 826-5257 • Fax: (216) 291-5949 or (800) 303-2800

Email: daviidh@msn.com • Website: www.Henrytools.com

**MODELS
3927GHLS**

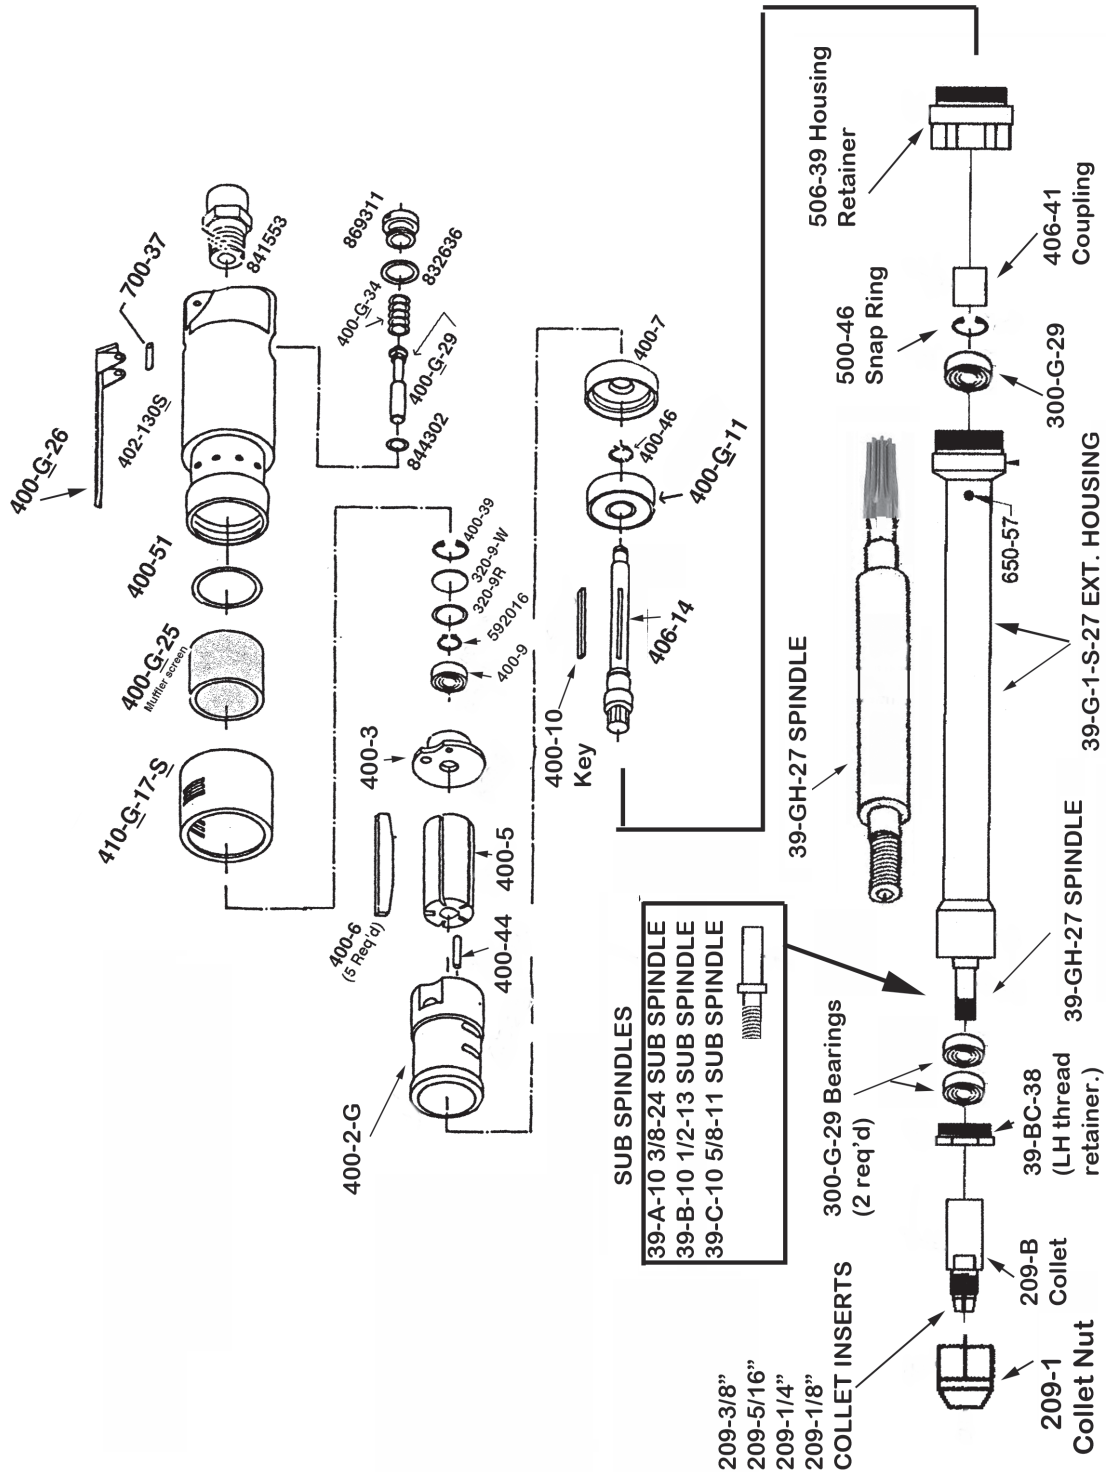

THE HENRY TOOL CO., MANUFACTURED BY HENRY TOOLS
 498 So. Belvoir Blvd., South Euclid, OH 44121 U.S.A.
 Ph: (216) 291-1011 or (800) 826-3537 • Fax: (216) 291-5949 or (800) 303-2800
 Email: davidh@hns.com • Website: www.HenryTools.com

