


General Operators Instructions and Service Manual

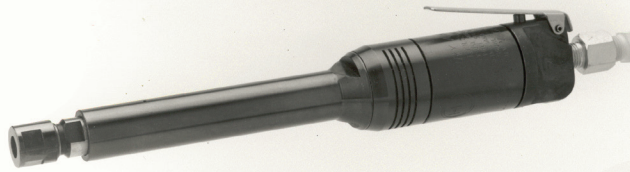

Models
40-GHERLS

**Old Style see note
below**

This tool is designed to operate on 90 psig(6.2 bar) maximum air pressure with 1/4"(8mm) hose. Do not use any wheel having an operating speed lower than actual free speed on grinder.

SAFETY

1. Check speed of tool with tachometer before every wheel & burr change or daily (which ever one is more frequent). If RPM exceeds rated speed stamped on tool, servicing is required.
2. At least on-half of the mandrel length (i.e. mounted wheel, ubrr, etc.) must be inserted into the collet. Secure collet chuck tightly.
3. Before mounting or removing a carbide burr or mounted point disconnect grinder from air supply. The carbide burr should fit properly on arbor; do not use bushings or wheel flanges to adapt a wheel to any arbor unless recommended by manufacturer.
4. Wear safety goggles and other protective clothing. Continuous exposure to vibration may cause injury to hands and arms.
5. Properly maintained air tools are less likely to fail or cause accidents. If tool vibrates unusually or produces an unusual noise, repair immediately.

LUBRICATION

Check for wet or dirty air. Excessive moisture in the air supply tends to wash lubricant away from the working parts of the tool and rust or corrode the interior. Grit will damage the interior by scoring closely fitted parts, and impede the action of the tool. If the conditions above are found, disconnect the tool and pour a liberal amount of recommended oil or

an SAE #10 oil cut with an equal quantity of kerosene into the air inlet.

Operate the tool to allow lubricant to flush accumulated gum and grit out the exhaust.

If outside factors are not to blame, disassemble the tool, thoroughly clean and inspect all parts and replace those worn or broken. Coat parts with air tool oil and reassemble.

DISASSEMBLY

1. Disconnect air and remove all wheels and accessories from the grinder.
2. Clamp tool in vise on backhead (400-G-4) flats.
3. Unscrew front housing (400-L-1). Remove from vise.
4. Remove snap ring (400-39) from within (400-3) plate with type 01 pliers.
5. Remove wafer (320-9W), o-ring (320-9R), and snap ring (59022) IF PRESENT.
6. Place assembly into vise collet end down. Clamp lightly onto cylinder (400-2-G).

7. Use 1/8" Punch to tap spindle (400-L-14-DA) out of rear bearing (400-9). Remove from vise.
8. Remove blades, rotor (400-5), key (400-10), plate (400-7), and snap ring (400-46) from assembly.
9. Place assembly in drill block (collet end down). Press spindle through bearing (400-G-11) with arbor press.
10. Place housing onto drill block (bearing down). Press bearing (400-L-9) out of front housing.
11. To check throttle valve, unscrew plug (869311). Remove gasket (832636), spring (400-G-34) and throttle valve (400-G-29). Replace O-ring (844302) if cracked or worn.

ASSEMBLY

1. Be sure all parts are clean and free from abrasives.
2. Press bearing (400-L-9) into end of housing (400-L-1) with arbor press or tap LIGHTLY with a RUBBER HAMMER. Be sure front flare of bearing is forward and flush with front of housing.
3. Lubricate bearing with clean grease. Place spindle (400-L-14-DA) through front of housing.
4. Press bearing 400-G-11) onto rear of spindle with arbor press and bearing driver.
5. Replace snap ring (400-46), end plate (400-7), key (400-10), and rotor(400-5).
6. Place 5 blades into slots of rotor. Replace cylinder with cylinder pin towards rear of tool.
7. Place endplate(400-3) onto end of cylinder with pin in smallest hole.
8. Press bearing (400-9) into end of endplate with bearing driver and arbor press. Replace snap ring (400-39).
9. Place o-ring (400-51), muffler (402-134), and exhaust deflector (400-G-17-S) over smaller end of case (400-G-1). Slip motor assembly into case and tighten by hand.
10. Place backhead (400-G-4) into vise. Tighten assembly onto backhead). Assemble collet & insert.(209-1).



Note: This tool has been discontinued and replaced with an updated model 40-EHL Series grinder. Henry Tools will continue to stock all parts for this model tool indefinitely.

THE HENRY TOOL CO. MANUFACTURED BY HENRY TOOLS
498 So. Belvoir Blvd., South Euclid, OH 44121 U.S.A.
Ph: (216) 291-1011 or (800) 826-5257 • Fax: (216) 291-5949 or (800) 393-2800
Email: davidhdh@msn.com • Website: www.Henrytools.com