


Model N-2RP Pistol Needle Scaling Hammer

THE HENRY TOOL CO., MANUFACTURED BY HENRY TOOLS 498 SO. BELVOIR BLVD., SOUTH EUCLID, OH 44121 U.S.A. PH: (216) 291-1011 OR (800) 826-5257 • FAX: (216) 291-5949 OR (800) 303-2800 EMAIL: DAVIIDH@MSN.COM • WEBSITE: WWW.HENRYTOOLS.COM


General Operators Instructions and Service Manual

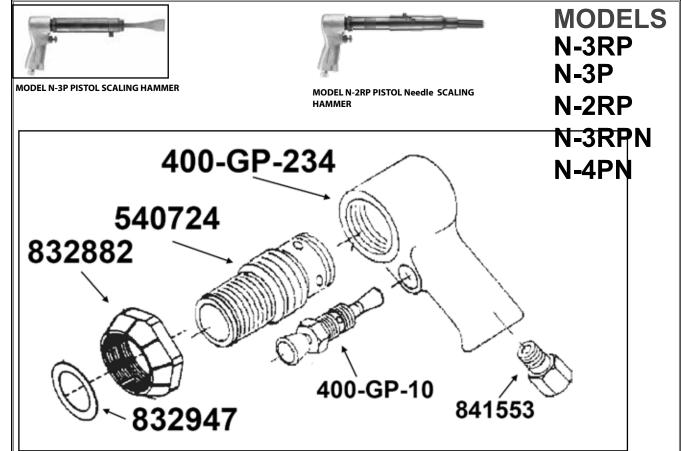

| PART NO. | DESCRIPTION |
|-----------|--|
| 831090-A | Barrel (SOLID)(includes 832700) |
| 831090 | (Includes 832700,832963 1 and 842801)(Replaceable Nose) |
| 832947 | Spacer |
| 832882 | BAckhead Lock ring |
| 540724 | Pistol Scaler Coupling |
| 400-GP-10 | Valve Assembly |
| 842553 | Screen Bushing |
| 832554 | Clip |
| 832956 | Retainer |
| 833527 | Rubber Buffer |
| 834043 | Needle (5") (19 are req'd) |
| 834024 | Needle (7")(19 are req'd) |
| 834045 | Needle Driver |
| 834046 | Needle Holder |
| 834779 | Needle Tube (Round) |
| | |

| PART NO. | | DESCRIPTION | | | | |
|-------------|-----------|---|--------|-------------------|-----|------------------------|
| 831109 | | Valve Block Assembly COMPLETE (sub-assembly) | | | | |
| 831322 | | Round Needle Front End Sub Assembly (Part Nos.834043,834044,834045 834046,834779) complete | | | | |
| PART NO. | DE | SCRIPTION | VIEW | OVERALL LENGTH | Sha | nk Type 1/2" Square |
| 839050 | C-200-7 | Angle Chisel | | 7 1/4″ | | |
| 839051 | D-200-7 | 1/2 Narrow Chisel | | 7 1/2″ | | |
| 839299 | C-200-12 | Angle Chisel | | 12″ | | |
| 839334 | C-200-18 | Angle Chisel | | 18″ | | |
| 839335 | D-200-18 | Narrow Chisel | | 18″ | | |
| 839341 | D-200-12 | Narrow Chisel | [] | 12″ | C | |
| 839467 | B-200-7 | Wide Chisel | \leq | 7″ | | |
| 839469 | B-200-12 | Wide Chisel | \leq | 12″ | | |
| 839470 | 2" Wide S | Scraper | \leq | 7 1/2″ | | |
| 839471 | 3" Wide S | Scraper | \leq | 7 1/2″ | | |

General Operators Instructions and Service Manual

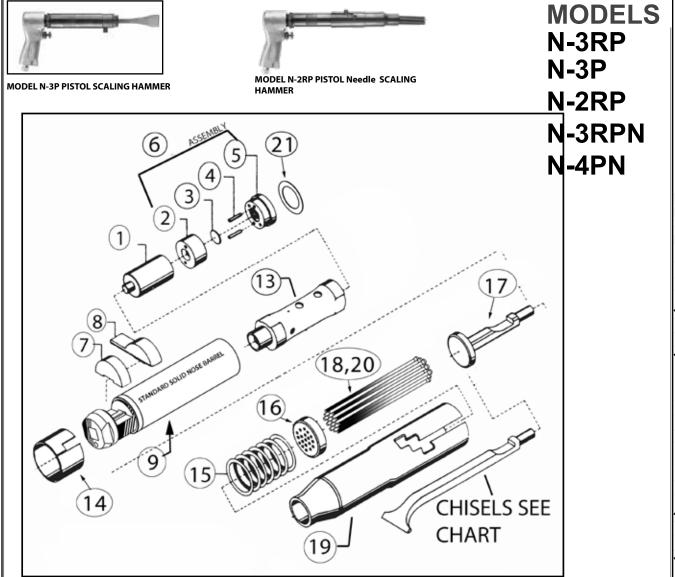

| ITEM NO. | PART NO. | DESCRIPTION |
|-------------|----------|--|
| 1 | 832373 | PISTON |
| 2 | 832508 | LOWER VALVE BLOCK |
| 3 | 832196 | VALVE DISC |
| 4 | 832126 | VALVE BLOCK PIN (2 Req'd) |
| 5 | 832173 | UPPER VALVE BLOCK |
| 6 | 831109 | ENTIRE VALVE BLOCK ASSEMBLY |
| 7 | 833527 | RUBBER BUFFER |
| 8 | 832956 | RETAINER |
| 9 | 831090-A | SOLID NOSE BARREL (INCLUDES 832700)(<i>STANDARD BARREL</i>) |
| 10 | 831090 | REMOVABLE TOOL NOSE BARREL |
| 11 | 842801 | KEY |
| 12 | 832963 | TOOL NOSE |
| | | |

| l | ITEM NO. | PART NO. | DESCRIPTION |
|---|-------------|----------|-------------------------------------|
| | 13 | 832700 | BARREL SLEEVE (LINER) |
| | 14 | 832554 | CLIP |
| | 15 | 834044 | SPRING |
| | 16 | 834046 | NEEDLE HOLDER |
| | 17 | 834045 | NEEDLE DRIVER |
| | 18 | 834024 | 7" NEEDLE STANDARD(19 are Req'd) |
| | 19 | 834779 | NEEDLE TUBE (ROUND STAN- DARD) |
| | 20 | 834043 | 5" NEEDLE (19 are Req'd) |
| | 21 | 832947 | SPACER |
| _ | | | |

. Ph: (216) 291-1011 or (800) 826-525 **JENR**

WWW.HENRYTOOLS.COM



General Operators Instructions and Service Manual



MODEL N-3P PISTOL SCALING HAMMER



MODEL N-2RP PISTOL Needle SCALING HAMMER

When using compressed air:

A. Use only sound, strong hose with secure couplings and connections.

B. Be sure there are no sharp points on metal hose parts.

C. Close the control valve in portable pneumatic tools before turning on air.

D. Before changing one pneumatic tool for another, turn off the air control valve. Never kink hose to stop air flow.

E. Wear suitable goggles, mask, protective clothing or safety devices.

F. Never use air to blow dust or chips from a persons hair, clothing, or safety devices.

G. Never point the hose at anyone. Practical jokes with compressed air have caused many serious injuries.

H. When using compressed air, see that no nearby workers are in line of airflow.

I. All compressed air supplies used for blowing must be equipped with 30 p.s.i. regulators.

J. If working with or near compressed air tools, wear goggles. Never point the tool or air hose at any person.

 Before starting work, learn what is underneath the surface. If gas pipe, electric conduit, sewers, water mains, or other objects are in the area, get definite information of their location (blueprints, if possible) and avoid them carefully.

2. Wear safety shoes, goggles, and hard hats at all times.

Also, wear ear protection.

3. Inspect the machine and equipment regularly, especially

drill steel. Never use defective equipment.

4. Check valves and connections carefully. Be especially careful when laying down the tool so that the trigger cannot be operated accidentally.

5. Thoroughly examine the slope and flare for loose rock.

6. Keep a good grip and watch your footing when tool is in use.

7. NEVER POINT A PORTABLE POWER HAMMER AT ANYONE.

 8. Before disconnecting a portable pneumatic tool, always turn the air off at the base control valve.
9. If the job is near a sidewalk or other thoroughfare,

place suitable screens to protect passersby from flying particles.

PERSONAL PROTECTION

There is no personal protective equipment that has proved to be effective against HAVS in stonemasons' yards. Anti-vibration gloves may be beneficial in keeping hands warm but they are generally not effective at reducing vibration at the low frequencies which are important in the development of VWF.

However, it is important to keep hands warm, as this increases blood flow. This can be done by wearing thermal gloves and providing localized heating and rest breaks in cold conditions for workers to exercise and keep their hands warm. Exercising hands and fingers. 10. Never use compressed air to blow dirt, dust, or chips from hands, face, or clothing.

MODELS

N-3RP

N-2RP

N-4PN

N-3RPN

N-3P

